

07-26-01

☆

FISH & RICHARDSON P.C.

4350 La Jolla Village Drive
Suite 500
San Diego, California
92122

Telephone
858 678-5070

Facsimile
858 678-5099

Web Site
www.fr.com

J1036 U.S. PRO
09/912795
07/24/01

07/24/01
JC796 U.S. PRO
Frederick P. Fish
1855-1930
W.K. Richardson
1859-1951

July 24, 2001

Attorney Docket No.: 09752-095001

Box Patent Application
Commissioner for Patents
Washington, DC 20231

Presented for filing is a new patent application claiming priority from a provisional patent application of:

Applicant: JASON F. HUNZINGER

Title: HANDOFF ADAPTATION FOR CDMA SYSTEMS

Enclosed are the following papers, including those required to receive a filing date under 37 CFR §1.53(b):

	Pages
Specification	17
Claims	16
Abstract	1
Declaration	2
Drawing(s)	6

Enclosures:

- Request For Early Publication Under 37 C.F.R. §1.219, 1 page, and a separate \$300 fee.
- Assignment cover sheet and an assignment, 2 pages, and a separate \$40 fee.
- Postcard.

Under 35 USC §119(e)(1), this application claims the benefit of prior U.S. provisional application 60/220,675, filed July 25, 2000.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No EL584807659US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit July 24, 2001

Signature Daniel T. Badilla

Typed or Printed Name of Person Signing Certificate Daniel T. Badilla



BOSTON
DALLAS
DELAWARE
NEW YORK
SAN DIEGO
SILICON VALLEY
TWIN CITIES
WASHINGTON, DC

Commissioner for Patents

July 24, 2001

Page 2

Basic filing fee	\$710
Total claims in excess of 20 times \$18	\$666
Independent claims in excess of 3 times \$80	\$400
Fee for multiple dependent claims	\$0
Total filing fee:	\$1776

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (858) 678-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

SCOTT C. HARRIS
PTO Customer No. 20985
Fish & Richardson P.C.
4350 La Jolla Village Drive, Suite 500
San Diego, CA 92122

Respectfully submitted,



Joseph L. Stevenson

Reg. No. 43,163

Enclosures

JLS/nzg

10124312.doc

10124312.doc

07/24/01
JC796 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Jason F. Hunzinger Art Unit : Unknown
Serial No.: to be assigned Examiner : Unknown
Filed : HERewith - July 24, 2001
Title : HANDOFF ADAPTATION FOR CDMA SYSTEMS

BOX PATENT APPLICATION

Commissioner for Patents
Washington, D.C. 20231

REQUEST FOR EARLY PUBLICATION UNDER 37 C.F.R. §1.219

Applicant hereby requests early publication under 37 C.F.R. §1.219 of the attached application for United States patent, entitled HANDOFF ADAPTATION FOR CDMA SYSTEMS.

Enclosed is the required fee for this request of \$300 as set forth in 37 C.F.R. §1.18(d). Please apply any additional fees and any other charges that may be required for this request to Deposit Account No. 06-1050.

Respectfully submitted,

Date: 7/24/01

Joseph L. Steven
Joseph L. Steven
Reg. No. 43,163

SCOTT C. HARRIS
Fish & Richardson P.C.
PTO Customer No. 20985
4350 La Jolla Village Drive, Suite 500
San Diego, CA 92122
Telephone: (858) 678-5070
Facsimile: (858) 678-5099
10124301.doc

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL584807659US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

July 24, 2001
Date of Deposit

Daniel T. Badilla
Signature

Daniel T. Badilla
Typed or Printed Name of Person Signing Certificate

07/30/2001 55ITHIB1 00000023 09912755

01 FC:195 300.00 QP

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: HANDOFF ADAPTATION FOR CDMA SYSTEMS
APPLICANT: JASON F. HUNZINGER

CERTIFICATE OF MAILING BY EXPRESS MAIL


Express Mail Label No. EL584807659US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

July 24, 2001

Date of Deposit

Signature



Daniel T. Badilla

Typed or Printed Name of Person Signing Certificate

HANDOFF ADAPTATION FOR CDMA SYSTEMS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 60/220,675, filed July 25, 2000, the entire disclosure of which is incorporated herein by reference.

TECHNICAL FIELD

[0002] This invention relates to wireless communications devices, and more particularly to handoff methods for wireless communications based on CDMA.

BACKGROUND

[0003] Cellular telephones may operate under a variety of standards including the code division multiple access (CDMA) cellular telephone communication system as described in TIA/EIA, IS-95, Mobile station-Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System, published July 1993. CDMA is a technique for spread-spectrum multiple-access digital communications that creates channels through the use of unique code sequences. In CDMA systems, signals can be and are received in the presence of high levels of interference. The practical limit of signal reception depends on the channel conditions, but CDMA reception in the system described in the

aforementioned IS-95 Standard can take place in the presence of interference that is 18 dB larger than the signal for a static channel. Typically, the system operates with a lower level of interference and dynamic channel conditions.

[0004] A mobile station using the CDMA standard constantly searches a Pilot Channel of neighboring base stations for a pilot that is sufficiently stronger than a pilot add threshold value T_ADD . As the mobile station moves from the region covered by one base station to another, the mobile station promotes certain pilots from the Neighbor Set to the Candidate Set, and notifies the base station or base stations of the promotion from the Neighbor Set to the Candidate Set via a Pilot Strength Measurement Message. The base station determines an Active Set according to the Pilot Strength Measurement Message, and notifies the mobile station of the new Active Set via a Handoff Direction Message. The mobile station will maintain communication with both the old base station and the new base station so long as the pilots for each base station are stronger than a pilot drop threshold value T_DROP . When one of the pilots weakens to less than a pilot drop threshold value, the mobile station notifies the base station of the change. The base station may then determine a new Active Set, and notifies the mobile station of that new Active Set. Upon notification by

the base station, the mobile station then demotes the weakened pilot to the Neighbor Set.

[0005] Switching pilots into and out of the Active Set of a mobile station causes several problems with the handoff. First, the mobile station may have several pilots active at the same time. Second, the system capacity is decreased. Third, excessive signaling between the mobile station and base stations results from the increased number of handoff messages. It is desired to provide a method and system that reduces the switching of pilots into and out of the Active Set of a mobile station.

SUMMARY

[0006] A method of determining handoff timing for a wireless device is provided. The method includes selecting a call characteristic. The call characteristic is evaluated to determine if it is relevant to current conditions. If the call characteristic is relevant, an adapted value for handoff timeout is determined based on the call characteristic. The handoff timeout is set to the adapted value.

[0007] The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of

the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

[0008] FIG. 1 is an illustration of a wireless communication system.

[0009] FIG. 2 is an illustration of a portion of a wireless communication system.

[0010] FIG. 3 is an illustration of a CDMA Handoff technique in accordance with the principles of the invention.

[0011] FIG. 4 is an illustration of a timeout adaptation method in accordance with the principles of the invention.

[0012] FIG. 5 is an illustration of an embodiment of a timeout adaptation method in accordance with the principles of the invention.

[0013] FIG. 6 is an illustration of waveforms depicting the operation of an embodiment of the invention.

[0014] Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0015] Figure 1 illustrates components of an exemplary wireless communication system. A mobile switching center 102 communicates with base stations 104a-104k (only one connection shown). The base stations 104a-104k (generally 104) transmits

data to and receives data from mobile stations 106 within cells 108a-108k (generally 108). A cell 108, corresponding to a geographic region, is served by a base station. Practically, said geographic regions often overlap to a limited extent.

[0016] A mobile station 106 is capable of receiving data from and transmitting data to a base station 104. In one embodiment, the mobile station 106 receives and transmits data according to a Code Division Multiple Access (CDMA) technique. CDMA is a communication technique that permits mobile users of wireless communication devices to exchange data over a telephone system, wherein radio signals carry data to and from the wireless devices. A set of standards that define a version of CDMA that is particularly suitable for use with the invention include IS-95, IS-95A, and IS-95B, Mobile Station-Base Station Compatibility Standard for Dual-Mode Spread Spectrum Systems; TIA/EIA/IS-2000-2, Physical Layer Standard for cdma2000 Spread Spectrum Systems; and TIA/EIA/IS-2000-5 Upper Layer (Layer 3) Signaling Standard for cdma2000 Spread Spectrum Systems, all of which are herein incorporated by reference in their entirety.

[0017] Under the CDMA standard, additional cells 108a, 108c, 108d, and 108e adjacent to the cell 108b permit mobile stations 106 to cross cell boundaries without interrupting communications. This is so because base stations 104a, 104c, 104d, and 104e in adjacent cells assume the task of transmitting

and receiving data for the mobile stations 106. The mobile switching center 102 coordinates all communication to and from mobile stations 106 in a multi-cell region. Thus, the mobile switching center 102 may communicate with many base stations 104.

[0018] Mobile stations 106 may move about freely within the cell 108 while communicating either voice or data. Mobile stations 106 not in active communication with other telephone system users may, nevertheless, continue to scan for transmissions from the base stations 104 in the cells 108 to detect pilots that are sufficiently strong with which to establish a communications link. In addition, mobile stations 106 may drop base stations 104 in which the energy level of the pilot is not sufficiently strong.

[0019] One example of such a mobile station 106 is a cellular telephone used by a vehicle driver who converses on the cellular telephone while driving in a cell 108b. Referring to Figure 2, a portion of a wireless system is shown. The cellular telephone synchronizes communication with the base station 104b by monitoring a pilot that is generated by the base station 104b. While powered on, the mobile station 106 continues to scan predetermined CDMA system frequencies for pilots from other base stations 104 such as the pilots from the base stations 104d and 104e as well as the pilot corresponding to the base station

104b. Upon detecting a pilot from another base station 104d, the mobile station 106 initiates a handoff sequence to add the pilot to the Active Set. Likewise, upon determining that the energy level of an Active Set pilot has weakened sufficiently and the handoff timeout value, T_{TDROP} , has been exceeded, the mobile station 106 initiates a handoff sequence to drop the pilot.

[0020] Wireless communications standards, require a mobile station to use a static T_{TDROP} value that is generally provided by the network. The pilot add and drop thresholds, T_{ADD} and T_{DROP} respectively are similarly generally provided by the network as are additional Pilot Set Maintenance parameters. The static value of T_{TDROP} is used for all pilots. Using a static T_{TDROP} value may lead to a pilot being thrashed into and out of the active set.

[0021] Figure 3 shows a flow diagram of a Pilot Set Maintenance and handoff process in accordance with the teachings of the invention. Incorporated within the handoff process is a method of dynamically selecting a value for the handoff timeout, T_{TDROP} , on a per pilot basis. In one embodiment this value may be selected within a range of permissible values where the network generally transmits such parametric information through base stations 104 transmitting to mobile stations 106. These parameters can be included in overhead messages, parameter messages, traffic or idle messages, or handoff messages. The

network may specify such a range by either specifying a nominal handoff timeout value and a range about that nominal value or by specifying maximum and minimum values. The range may be specified indirectly according to a formula or table lookup. In one embodiment, the range may be specified by the network as an index into the static T_TDROP table included in the IS-95-A standard. In another embodiment, the range may be specified by a Handoff Timeout Deviation about a nominal value such that the adapted handoff timeout is limited to being between [Nominal Handoff Timeout $\times (1 - 2^{8-\text{Handoff Timeout Deviation}})$] and [Nominal Handoff Timeout $\times (1 + 2^{8-\text{Handoff Timeout Deviation}})$]. In this case, the network need only send the Nominal Handoff Timeout and the Handoff Timeout Deviation parameters.

[0022] The network can be calibrated or configured with parameter values as a result of network engineering or that are known to result in compliance with minimum performance standards.

[0023] Dynamically selecting the T_TDROP value advantageously improves the signal to noise ratio (SNR) of the system, increases capacity, reduces the signaling overhead, and reduces the chances of a call being inadvertently dropped. The described handoff process is merely exemplary and is non-limiting. The scope of the invention is not limited to the described handoff process. In addition, although the process is described as

being executed within a mobile station, the scope of the invention includes performing the process either entirely or partially in other system components such as base stations and mobile switching centers.

[0024] At block 200, the mobile station 106 searches for pilots from base stations 104 and measures their energies. When a pilot's energy is measured, the process proceeds to block 202 and the pilot energy is filtered such as using an infinite impulse response filter, or a running average or mean.

Proceeding to block 204 the Active Set is checked to determine if the pilot is active, i.e. included. If the pilot is not active, then at block 206 the energy level of the pilot is tested against the default minimum required energy level for adding a pilot, T_{ADD} . If the energy level of the pilot does not exceed T_{ADD} , control returns to the start of the process at block 200. If the energy level of the pilot does exceed T_{ADD} , the mobile station 106 moves the pilot into the Candidate Set and sends a Pilot Strength Measurement Message (PSMM) to the current base stations to request that the pilot be added to the Active Set, block 208. Proceeding to block 210, the mobile station 106 then determines an adapted value for the pilot drop handoff timeout, T_{TDROP} . At a later step in the handoff process, the value of T_{TDROP} is compared to the time duration that the pilot signal energy is below a predetermined level to

determine whether a request to drop the pilot should be sent. The adapted value of T_TDROP is determined on a per pilot basis.

[0025] In the present embodiment of the handoff process, the value of T_TDROP is adapted for each specific pilot at the time of a handoff request to add that pilot. The scope of the invention also includes adapting the value of T_TDROP periodically, as well as at other times within the handoff process such as a request to remove a pilot, block 230. In other embodiments, the adaptation could occur when a pilot energy crosses a threshold, parametric information is updated from the network, or at the time of measuring pilot energy. In addition, a single value of T_TDROP may be dynamically determined and applied to all pilots or particular sets of pilots. For example, these sets could be the Active Set, Neighbor Set, Candidate Set, and Remaining Set.

[0026] Returning to block 204, if the pilot that was detected is an active pilot, control continues on to block 212 to timer operations and determining whether to remove the pilot. Block 214 checks if the timer corresponding to the pilot is running or stopped. If the timer is not running, then the process continues to block 216. If E_c/I_o is equal to or exceeds T_DROP , the pilot strength is considered sufficient to retain the pilot in the Active Set and control returns to the start of the process. Otherwise, if E_c/I_o is less than T_DROP for the Active Set

pilot, then instead of immediately removing the pilot from the Active Set, the timer begins a timeout sequence, block 218. If a later measurement of E_c/I_o for the pilot exceeds T_DROP before the timer times out by reaching T_TDROP , the timer is reset, blocks 220 and 222.

[0027] On the other hand, if a later measurement of E_c/I_o does not exceed T_DROP , then continuing to block 224, the timer is incremented. At block 226, the timer is compared to the adapted value of $T_TDROP(i)$ corresponding to the pilot to determine whether the timer has timed out. If the timer has not timed out, control returns to the start of the process at block 200. If the timer has timed out, indicating that the pilot strength has been below T_DROP for an interval exceeding T_TDROP , the process proceeds to block 228 and the mobile station 106 sends a Pilot Strength Measurement Message (PSMM) to the current Base Stations 104 requesting a Handoff Direction Message (HDM) to remove the pilot from the Active Set.

[0028] Referring to Figure 4, a block diagram of an adaptation process for dynamically determining the handoff timeout value, T_TDROP , is shown. Initially, at block 240 a call characteristic that can be statistically analyzed for predicted performance is selected. In one embodiment, the handoff frequency is selected. However, the scope of the invention includes other call characteristics such as motion of

the mobile station, signal quality (as indicated by but not limited to combined Eb/Nt, Frame Error Rate, Symbol Error Rate, Bit Error Rate, number of retransmissions), energy level crossing, and energy variance. A history or statistics are collected for the selected call characteristic, block 241. History may include the recent timing of handoffs adding or deleting pilots, the recent signal quality changes over time, position and motion of the wireless mobile station, or the past adapted handoff timeout values that were in use. Data relevant to the call characteristic is evaluated to determine if that characteristic is relevant to the current conditions, block 242. The call characteristic data includes historical or statistical information of the call characteristic. For example, if handoff frequency is the selected call characteristic, then the history of additions and drops of the pilot is evaluated to determine if the time since the last drop is greater than a predetermined minimum time; if so, then handoff frequency is considered not currently relevant. If the call characteristic is considered not currently relevant, the process continues on to block 244 and the value of T_TDROP is set to a default timeout value. The default timeout value is preferably a minimum time, however the default timeout value may be other measures of time such as a maximum or a mid-point. If the call characteristic is relevant, the process proceeds to block 246 and the predicted handoff

performance is determined. Then at block 248 of the process, a new adapted value for the handoff timeout is determined based upon the predicted handoff performance and the current handoff timeout value. A linear function is applied to the current handoff timeout value to determine the adapted handoff timeout value. The scope of the invention also includes employing other functions for determining the adapted handoff value such as applying a multi-order function, incrementing/decrementing by a fixed quantity, and selecting a value from a lookup table that is constructed based on past decisions. T_{TDROP} is then set to the adapted value at block 250 of the process.

[0029] Referring to Figure 5, a detailed flow diagram of an embodiment of the handoff adaptation is illustrated. The flow diagram illustrates a method of determining predicted handoff performance in order to effectively adapt the value of handoff timeout. The handoff adaptation uses the past performance of the handoff frequency to compute an adapted value. The time since the pilot was last removed from the Active Set is computed so that the relevance of using the handoff frequency can be evaluated, block 260. Proceeding to process block 262, if the time since the last drop is greater than T_{min} , the process continues on to block 264 where the value of $T_{TDROPs(i)}$ is set equal to the default value $T_{TDROPmin}$. If the time since the last drop is less than T_{min} , then the process proceeds to block

266 and statistics on the periods of time that the pilot has remained out of the active set are collected. The historical data is used to determine whether the total estimated time that the pilot could be removed from the Active Set is less than the maximum drop timer value, block 268. This determines whether the T_TDROP value can be adapted so that the pilot is not thrashed in and out of the Active Set needlessly. If the pilot is likely to be thrashed, then the process proceeds to block 270 and the value of T_TDROP is incremented. Otherwise the process continues on to block 272, and the value of T_TDROP is decremented. The rate or amount of increment and decrement may be based on adaptive functions, fixed functions, functions that are dependent on the range, as well as other well known functions. The rate or amount of increment and decrement may be transmitted by the network. In one embodiment, the rate or amount of increment and decrement may be computed by scaling a nominal step value by a function of the current set of minimum time periods associated with a set of pilots. In another embodiment, the function for the amount of increment is a scaling by the ratio of the number of handoff timeouts above the nominal timeout to the total handoff timeouts and the function for the amount of decrease is a scaling by the ratio of the number of handoff timeouts below the nominal timeout to the total handoff timeouts.

[0030] A hysteresis factor, $C_{\text{hyst_comp}}$, block 268, may be used to compensate for differences between the add and drop energy thresholds. In one embodiment, the hysteresis factor is larger if the difference between the pilot add and drop thresholds T_{ADD} and T_{DROP} respectively is large and vice-versa. In the embodiment shown in Figure 5, the hysteresis factor is multiplied by the maximum value of the range of the dynamic handoff timeout value and compared to the sum of the time since the last handoff and the current handoff timeout value. If the hysteresis factor term is less than the sum, this indicates that even using the maximum handoff timeout value may be unlikely to result in a pilot being kept during a drop in energy below the T_{DROP} threshold and, therefore, T_{TDROP} is decremented according to block 270. If the hysteresis factor term is greater than the sum, this indicates that using a larger handoff timeout value may enable the mobile station to avoid dropping a pilot whose energy temporarily drops below the T_{DROP} threshold and, therefore, T_{TDROP} is incremented according to block 272.

[0031] Referring to Figure 6, waveforms associated with a mobile station 106 dropping and adding a pilot in accordance with the teachings of the invention are shown. A first waveform 280 shows a channel 1 test pilot in which the pilot energy-to-interference ratio, E_c/I_o , remains greater than the threshold

value at which a pilot is moved into the candidate set, T_{ADD} . A second waveform 282 shows a channel 2 test pilot in which E_c/I_o fluctuates from above T_{ADD} to below T_{DROP} . An active set maintenance profile 284 shows the channel 2 pilot set maintenance of the mobile station 106 in response to the fluctuations of the channel 2 test pilot. The profile 284, being high or low, signifies that the channel 2 pilot is in or out, respectively, of the active set.

[0032] For the initial couple of cycles of the active set waveform, the channel 2 test pilot is added and dropped in conjunction with changes in E_c/I_o . Then, at point A 286 of the active set maintenance profile 284, the adaptation of T_{TDROP} to a larger value, causes the mobile station 106 to retain the channel 2 test pilot in the active set despite E_c/I_o of channel 2 being less than T_{DROP} . The channel 2 test pilot is retained in the active set until at point B 288 the adapted value of T_{TDROP} is exceeded and the channel 2 test pilot is dropped from the active set.

[0033] A test procedure for testing the operation of the adaptation technique may include Active Set Loss Detection tests included in TIA/EIA/IS-98-C, Recommended Minimum Performance Standards for Dual-Mode Spread Spectrum Mobile Stations, which is hereby incorporated by reference in its entirety. In another embodiment the test procedure may include testing for compliance

with the expected behavior similar to that shown in Figure 6. That test procedure includes varying the amplitudes and time durations associated with the call characteristics to verify the operating characteristics of the adaptation technique. For example, either the amplitude of the pilot energy or the time duration that the pilot energy is below T-DROP may be varied to test the adaptation algorithm. Increasing the amplitude of the pilot energy during a drop, or decreasing the time duration of a drop, both cause an increase in the adaptation of T-TDROP, leading to an increased likelihood of the pilot being retained in the Active Set.

[0034] A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention such as executing all or portions of the adaptation method in a base station. Accordingly, other embodiments are within the scope of the following claims.

WHAT IS CLAIMED IS:

1. A method of determining handoff timing parameters for a wireless device, comprising:
 - a) measuring a call characteristic;
 - b) determining if the call characteristic is relevant to current conditions;
 - c) in response to determining the call characteristic is relevant, determining an adapted value for handoff timeout based on the call characteristic; and
 - d) setting the handoff timeout to the adapted value.
2. The method of Claim 1 wherein the call characteristic is selected from the group consisting of handoff frequency, energy level crossing, motion of the wireless device, energy variance, and signal quality.
3. The method of Claim 1 wherein determining the adapted value includes;
 - determining a predicted handoff performance; and
 - determining the adapted value for the handoff timeout based on the predicted handoff performance.
4. The method of Claim 3 wherein determining the predicted handoff performance includes;

collecting statistics of the call characteristic; and
computing the predicted handoff performance based on the
call characteristic statistics.

5. The method of Claim 3 wherein determining the
adapted value includes applying an adaptation function to a
current value of the handoff timeout.

6. The method of Claim 5 wherein the adaptation
function limits the adapted value between a maximum value and
a minimum value.

7. The method of Claim 5 wherein the adaptation
function is selected from the group consisting of a linear
function, a multi-order function, incrementing or decrementing
by a fixed quantity, and selecting a value from a lookup
table.

8. The method of Claim 3 wherein the step of
determining the adapted value includes setting the handoff
timeout value to a nominal value within a range of values.

9. The method of Claim 1 further comprising setting the
handoff timeout value to a default value if the call
characteristic is not relevant to current conditions.

10. The method of Claim 9 wherein the default value is selected from the group consisting of a minimum value, a maximum value, a mid-point value between the minimum value and maximum value, and a specified nominal value.

11. The method of Claim 1 wherein determining the adapted value for handoff timeout is executed at a time selected from the group consisting of at the time of requesting to add a potential pilot, at the time of requesting to drop a current pilot, at the time of measuring the call characteristic, at the time a pilot energy crosses a threshold, and periodically.

12. The method of Claim 1 further comprising receiving a range of adapted values of handoff timeout; and limiting the adapted value of the handoff timeout to within the range of adapted values.

13. The method of Claim 1 wherein the method is processed within one or more wireless components selected from the group consisting of mobile stations, base stations, and mobile switching centers.

14. A method of determining handoff timing parameters for a wireless device, comprising:

- a) measuring a call characteristic;
- b) determining if the call characteristic is relevant to current conditions;
- c) if the call characteristic is relevant;
 - i) determining a predicted handoff performance; and
 - ii) determining the adapted value for the handoff timeout based on the predicted handoff performance;
 - iii) setting the handoff timeout to the adapted value; and
- d) if the call characteristic is not relevant, setting the handoff timeout to a default value.

15. The method of Claim 14 wherein the call characteristic is selected from the group consisting of handoff frequency, energy level crossing, motion of the wireless device, energy variance, and signal quality.

16. The method of Claim 14 wherein determining the predicted handoff performance includes;

- collecting statistics of the call characteristic; and
- computing the predicted handoff performance based on the call characteristic statistics.

17. The method of Claim 14 wherein determining the adapted value includes applying an adaptation function to the current value of the handoff timeout.

18. The method of Claim 17 wherein the adaptation function limits the adapted value between a maximum value and a minimum value.

19. The method of Claim 17 wherein the adaptation function is selected from the group consisting of a linear function, a multi-order function, incrementing or decrementing by a fixed quantity, and selecting a value from a lookup table.

20. The method of Claim 14 wherein the default value is selected from the group consisting of a minimum value, a maximum value, a mid-point value between the minimum value and maximum value, and a specified nominal value.

21. A method of executing a handoff operation in a wireless device, comprising:

searching a radio frequency spectrum for a plurality of pilots;

assigning default values for handoff timeout corresponding to each pilot;

determining adapted values for handoff timeout, the adapted values based on a call characteristic associated with each pilot;

making drop decisions for each pilot based on the adapted value of the handoff timeout corresponding to each pilot.

22. The method of Claim 21 wherein determining adapted values includes;

- a) measuring the call characteristic;
- b) determining if the call characteristic is relevant to current conditions;
- c) in response to determining the call characteristic is relevant, determining an adapted value for handoff timeout of a corresponding pilot based on the call characteristic; and
- d) setting the handoff timeout of the corresponding pilot to the adapted value.

23. The method of Claim 22 wherein the call characteristic is selected from the group consisting of handoff frequency, energy level crossing, motion of the wireless device, position of the wireless device, signal quality, and energy variance.

24. The method of Claim 21 wherein determining adapted values includes;

determining a predicted handoff performance corresponding to each pilot; and

determining adapted values for the handoff timeout of each pilot based on the corresponding predicted handoff performance.

25. The method of Claim 24 wherein determining the predicted handoff performance includes;

collecting statistics of the call characteristic; and

computing the predicted handoff performance based on the call characteristic statistics.

26. The method of Claim 21 wherein determining adapted values for handoff timeout is executed at a time selected from the group consisting of at the time of requesting to add a potential pilot, at the time of requesting to drop a current pilot, at the time of measuring the call characteristic, at the time a pilot energy crosses a threshold, and periodically.

27. The method of Claim 21 wherein the method is processed within one or more wireless components selected from the group consisting of mobile stations, base stations, and mobile switching centers.

28. A method of executing a handoff operation in a wireless device, comprising:

searching a radio frequency spectrum for a plurality of pilots;

forming a plurality of sets of associated pilots;

assigning a default value for handoff timeout corresponding to each set of pilots;

determining adapted values for handoff timeout, the adapted values based on a call characteristic associated with each set of pilots;

making drop decisions for each pilot based on the adapted value of the handoff timeout corresponding to each pilot's set.

29. A system for determining handoff timing parameters for a wireless device, comprising:

a controller to measure a call characteristic that is relevant to current conditions, the controller to determine an adapted value for handoff timeout based on the call characteristic, and to set the handoff timeout to the adapted value.

30. The system of Claim 29 wherein the call characteristic is selected from the group consisting of

handoff frequency, energy level crossing, motion of the wireless device, energy variance, and signal quality.

31. The system of Claim 29 wherein the adapted value for handoff timeout is determined at a time selected from the group consisting of at the time of requesting to add a potential pilot, at the time of requesting to drop a current pilot, at the time of measuring the call characteristic, at the time a pilot energy crosses a threshold, and periodically.

32. The system of Claim 29 wherein the controller collects statistics of the call characteristic and computes the predicted handoff performance based on the call characteristic statistics.

33. The system of Claim 29 wherein the controller determines a predicted handoff performance and determines the adapted value for the handoff timeout based on the predicted handoff performance.

34. A system for performing handoffs in a wireless communication network, comprising:

- a) a mobile station;
- b) a plurality of base stations;
- c) a dynamic handoff timeout algorithm for adapting a

handoff timeout value; and

d) a parameter configuration protocol for communicating parameters for use by said dynamic handoff timeout algorithm from one or more of said plurality of base stations to said mobile station.

35. The system of Claim 34 further comprising:

a controller to measure a call characteristic.

36. The system of Claim 35 wherein said dynamic handoff timeout algorithm is executed at a time selected from the group consisting of at the time of requesting to add a potential pilot, at the time of requesting to drop a current pilot, at the time of measuring a call characteristic, at the time a pilot energy crosses a threshold, periodically, and at the time said parameters are updated from the network.

37. The system of Claim 35 wherein at least one of said base stations generates a pilot having an energy level; and wherein said dynamic handoff timeout algorithm decrements said handoff timeout value for the pilot if said mobile station predicts, based on said call characteristic that said pilot energy level will be below a threshold for a time greater than a maximum allowed handoff timeout value.

38. The system of Claim 37 wherein said maximum allowed handoff timeout value is multiplied by a hysteresis factor before said mobile station predicts.

39. The system of Claim 35 wherein at least one of said base stations generates a pilot having an energy level; and wherein said dynamic handoff timeout algorithm increments said handoff timeout value for the pilot if said mobile station predicts, based on said call characteristic, said pilot energy level will be below a threshold for a time less than a maximum allowed handoff timeout value.

40. The system of Claim 39 wherein said maximum allowed handoff timeout value is multiplied by a hysteresis factor before said mobile station predicts.

41. The system of Claim 35 wherein said dynamic handoff timeout algorithm determines an adapted value for handoff timeout based on said call characteristic and sets the handoff timeout to said adapted value.

42. The system of Claim 35 wherein the call characteristic is selected from the group consisting of handoff frequency, energy level crossing, motion of the wireless device, energy variance, and signal quality.

43. The system of Claim 35 wherein said dynamic handoff timeout algorithm comprises:

- a) a pilot set maintenance component including pilot drop handoff timers;
- b) a searcher component to measure pilot energies;
- c) a handoff timeout adaptation algorithm for determining an adapted value for handoff timeout based on said call characteristic.

44. The system of Claim 43 further comprising a relevant history determination component that limits said adaptation algorithm to use a default value when said call characteristic is not currently relevant.

45. The system of Claim 44 wherein relevance of said call characteristic is a function of the time since the last handoff of a plurality of pilots.

46. The system of Claim 44 wherein said default value is selected from the group consisting of a minimum value, a maximum value, a mid-point value between the minimum value and maximum value, and a specified nominal value.

47. The system of Claim 34 wherein said dynamic handoff timeout algorithm is implemented in said mobile station.

48. The system of Claim 34 wherein said dynamic handoff timeout algorithm is implemented in one or more of said plurality of base stations.

49. The system of Claim 34 wherein said parameters communicated by said parameter configuration protocol include a Nominal Handoff Timeout value and a Handoff Timeout Deviation value which are used to specify the end-points of a range of allowed values for said adapted handoff timeout as follows:

$$[\text{Nominal Handoff Timeout} \times (1 - 2^{8-\text{Handoff Timeout Deviation}})] \text{ and } [\text{Nominal Handoff Timeout} \times (1 + 2^{8-\text{Handoff Timeout Deviation}})].$$

50. The system of Claim 34 wherein said parameters communicated by said parameter configuration protocol include parameters selected from the group consisting of a nominal handoff timeout value, a range of handoff timeout values about a nominal handoff timeout value, a maximum handoff timeout value, a minimum handoff timeout value, an index into a table of parameter configurations stored in said mobile station, a plurality of inputs to a plurality of formulae that indirectly determine the values of parameters, a minimum time since the

mobile station last dropped, a hysteresis compensation factor, an adaptation value to increment the handoff timeout value, and an adaptation value to decrement the handoff timeout value.

51. The system of Claim 34 wherein said parameter configuration protocol communicates said parameters from said plurality of base stations to said mobile station using messages selected from the group consisting of overhead messages, parameter messages, traffic messages, idle messages, and handoff messages.

52. The system of Claim 34 wherein said mobile station includes memory for storing said parameters.

53. A method for testing a dynamic handoff timeout algorithm used within a wireless communication system, comprising:

a) communicating a plurality of test inputs representing channel signals to a mobile station, each of the plurality of test inputs having an energy level;

b) communicating dynamic handoff timeout algorithm parameters to said mobile station;

c) operating said mobile station in call mode using said test inputs;

d) periodically varying the energy level of at least one of the plurality of test inputs above a pilot add threshold and below a pilot drop threshold;

e) performing said dynamic handoff timeout algorithm;

f) monitoring handoffs and handoff timing associated with the mobile station ; and

g) comparing said handoffs and handoff timing to a minimum performance reference.

54. The method of Claim 53 further comprising varying the time said energy level of at least one of said plurality of test inputs is above said add threshold and below said drop threshold.

55. A method of executing a handoff operation in a wireless device, comprising:

searching a radio frequency spectrum for a pilot;

assigning a default value for handoff timeout corresponding to the pilot;

determining an adapted value for handoff timeout, the adapted value based on a call characteristic associated with the pilot;

making drop decisions for the pilot based on the adapted value of the handoff timeout corresponding to the pilot.

56. The method of Claim 55 wherein determining an adapted value includes;

- a) measuring the call characteristic;
- b) determining if the call characteristic is relevant to current conditions;
- c) in response to determining the call characteristic is relevant, determining the adapted value for handoff timeout based on the call characteristic; and
- d) setting the handoff timeout to the adapted value.

57. The method of Claim 55 wherein the call characteristic is selected from the group consisting of handoff frequency, energy level crossing, motion of the wireless device, position of the wireless device, signal quality, and energy variance.

ABSTRACT

A method of determining handoff timing for a wireless device is provided. The method includes selecting a call characteristic. The call characteristic is evaluated to determine if it is relevant to current conditions. If the call characteristic is relevant, an adapted value for handoff timeout is determined based on the call characteristic. The handoff timeout is set to the adapted value.

10112635.doc

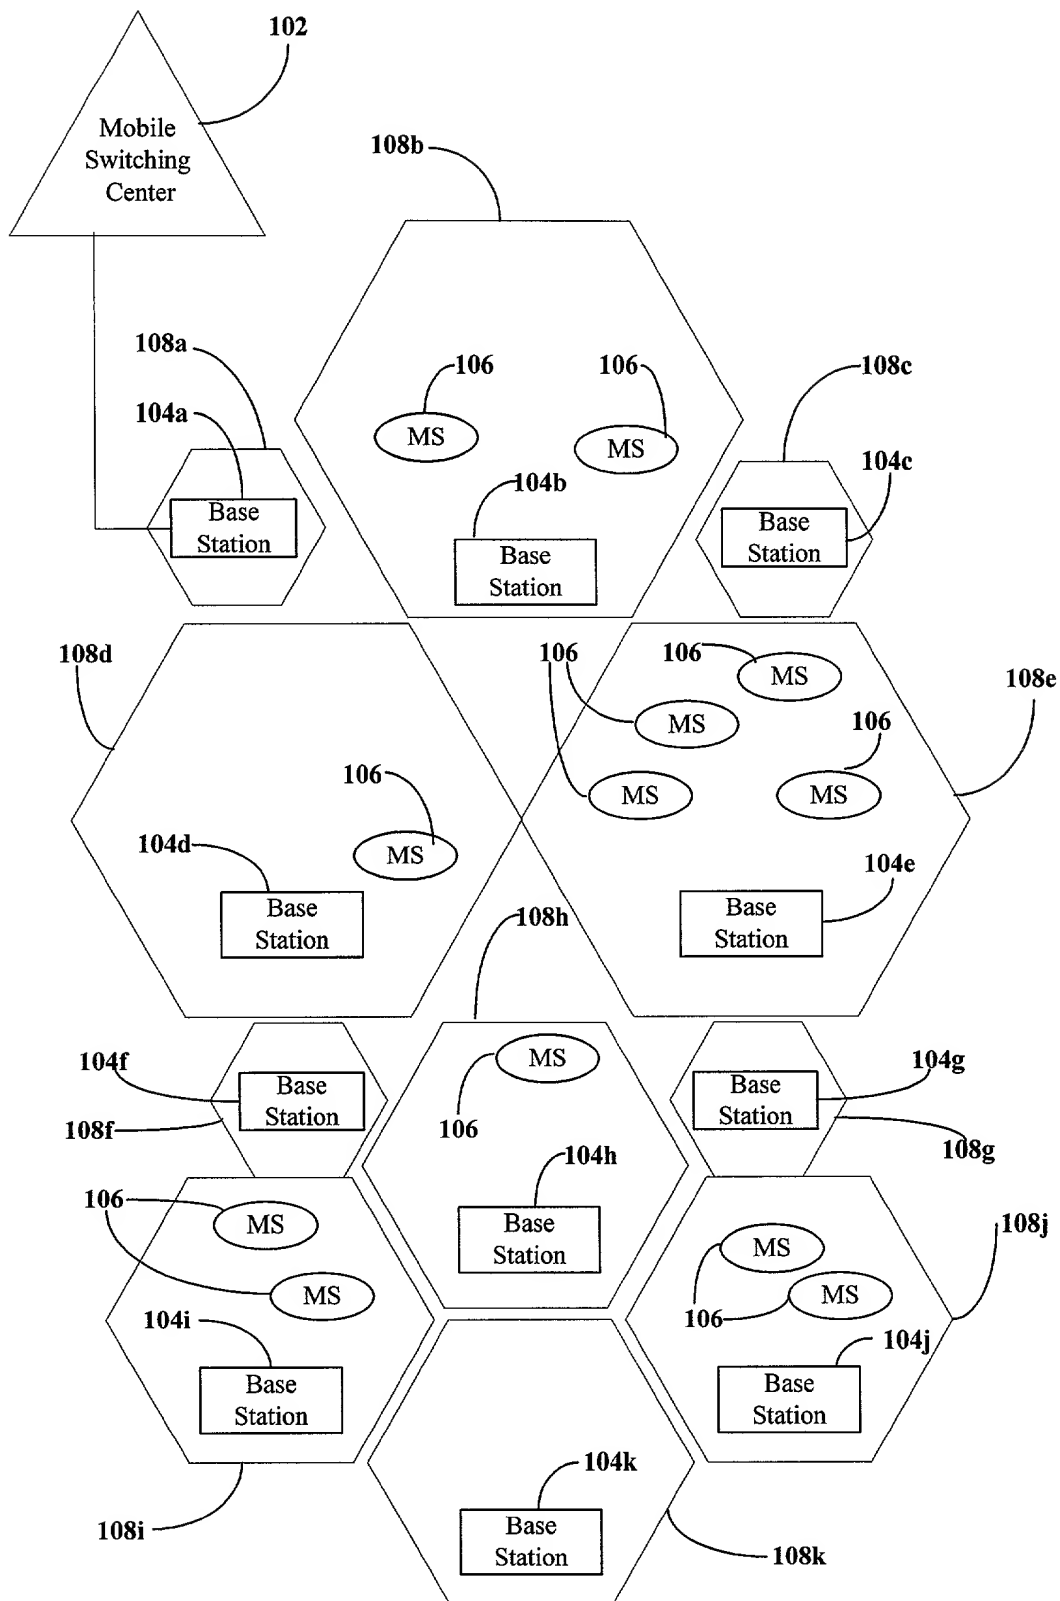


Figure 1

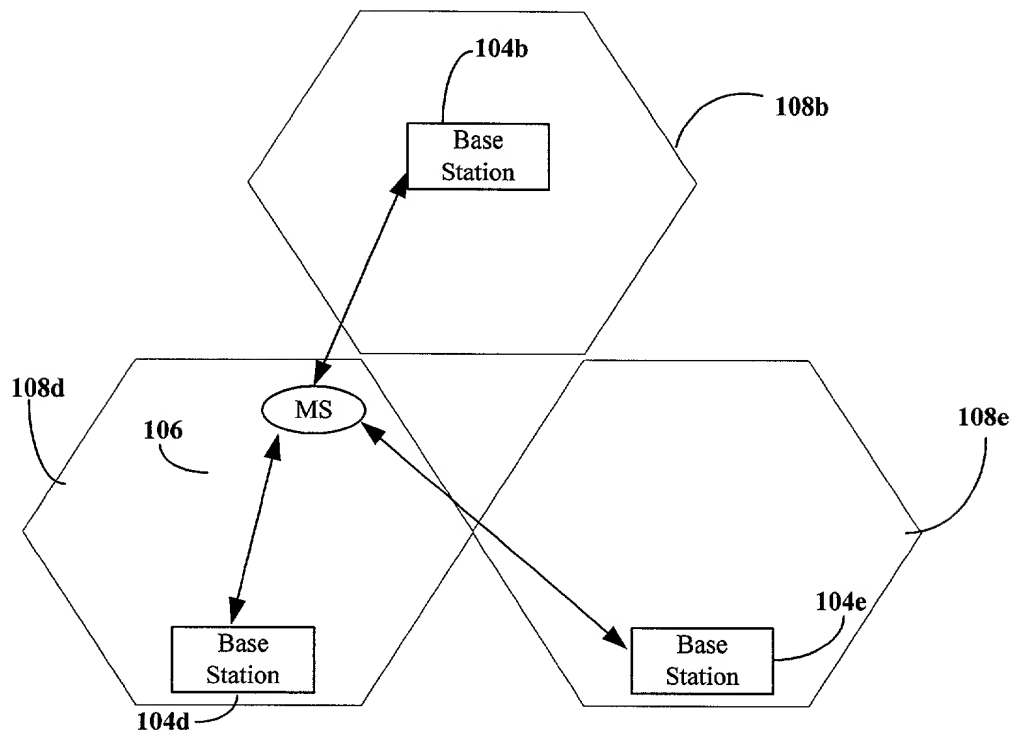


Figure 2

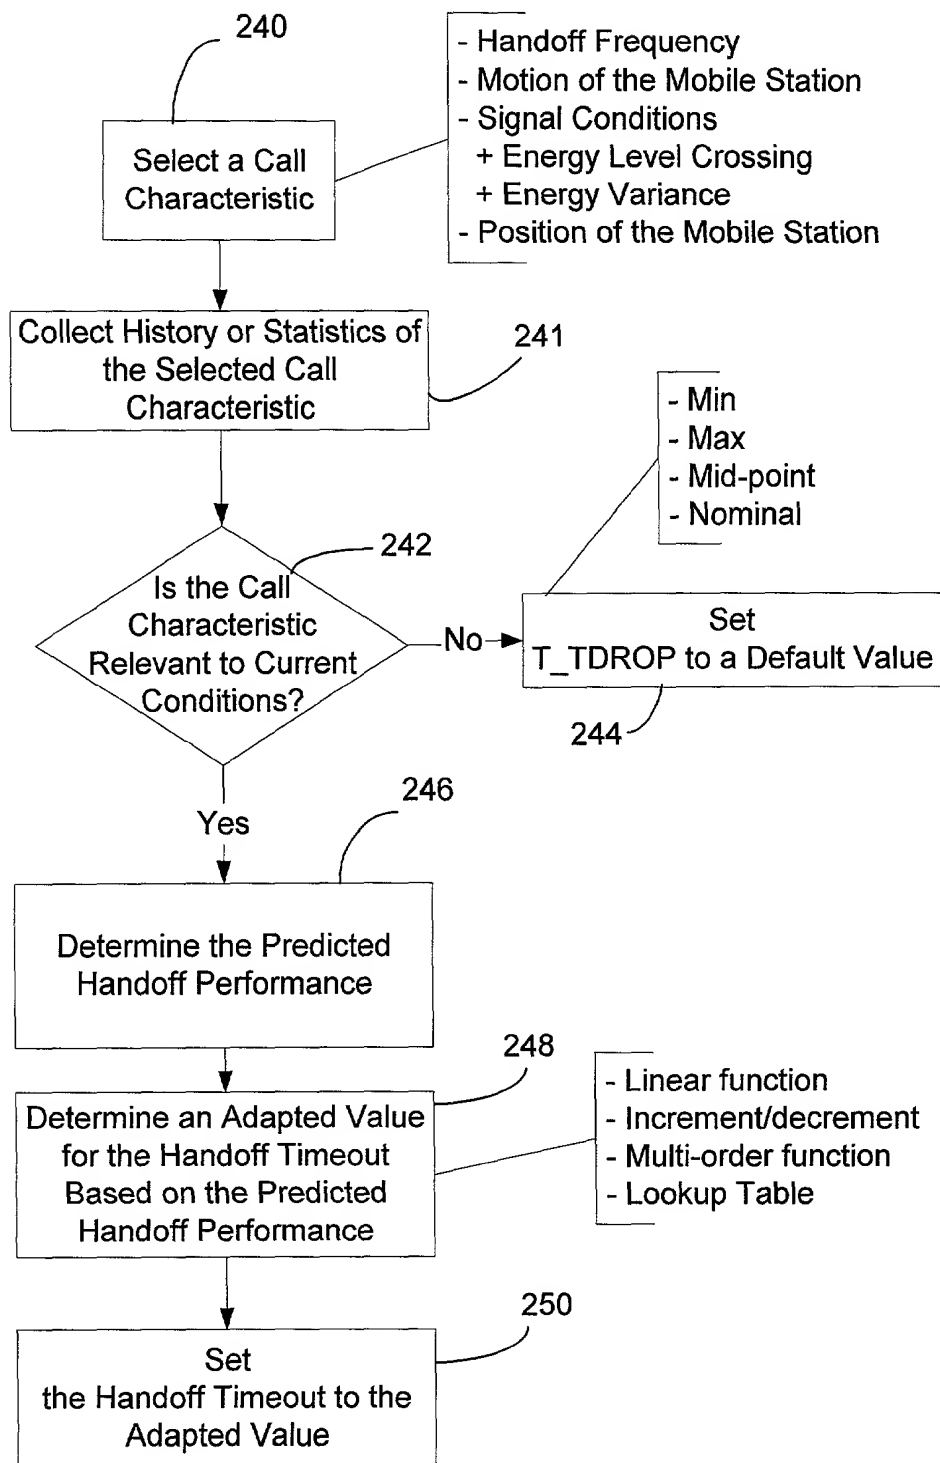


FIG. 4

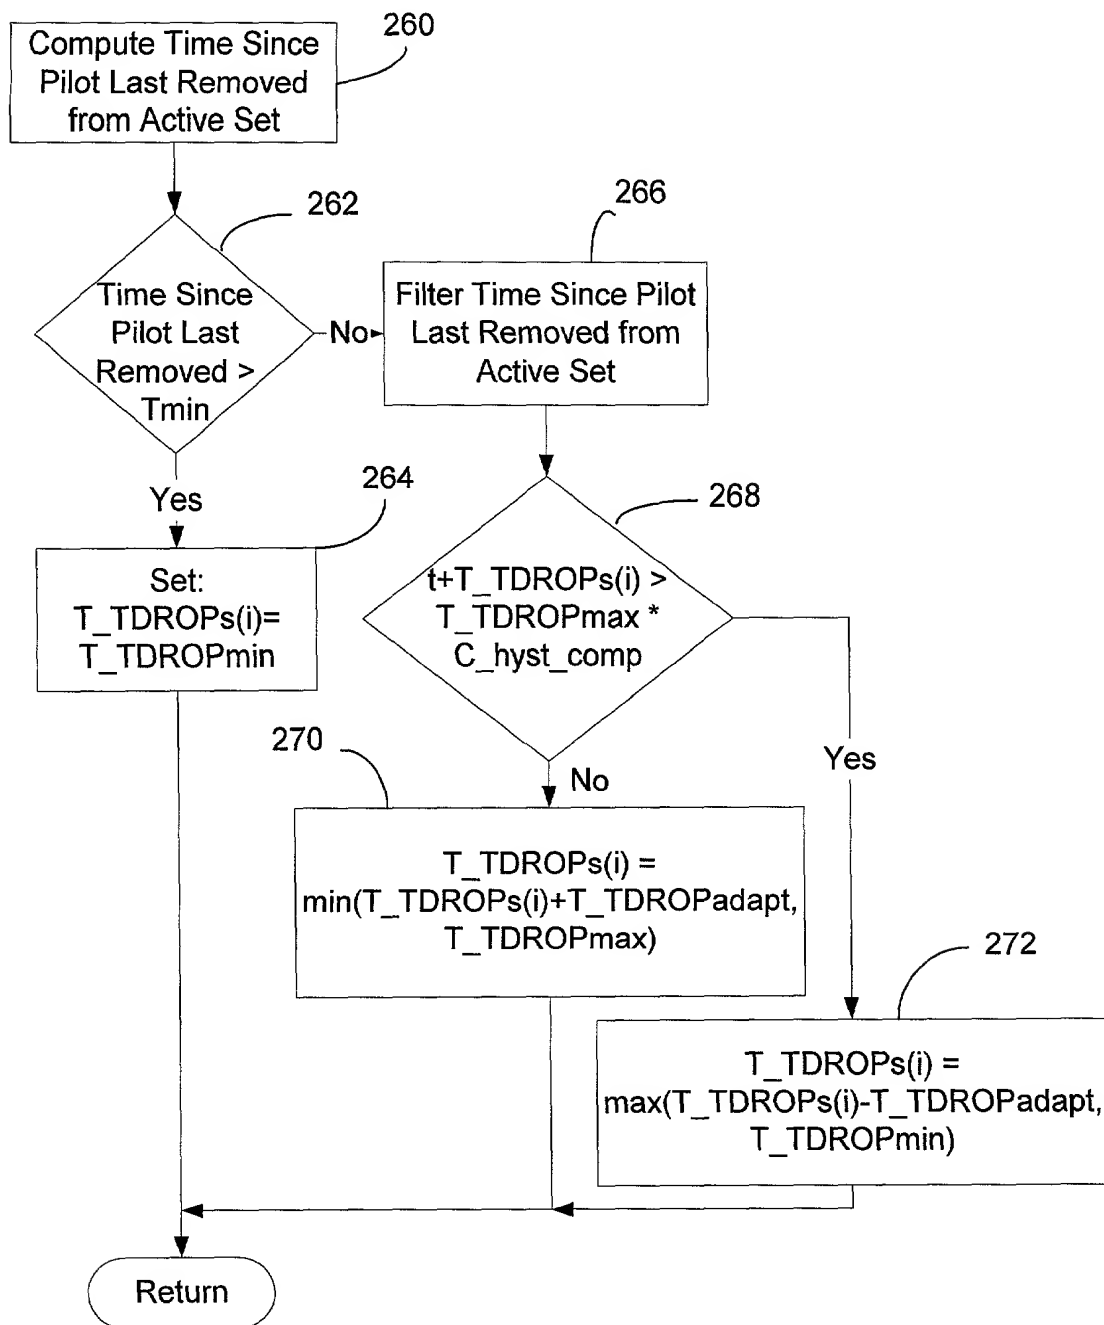


FIG. 5

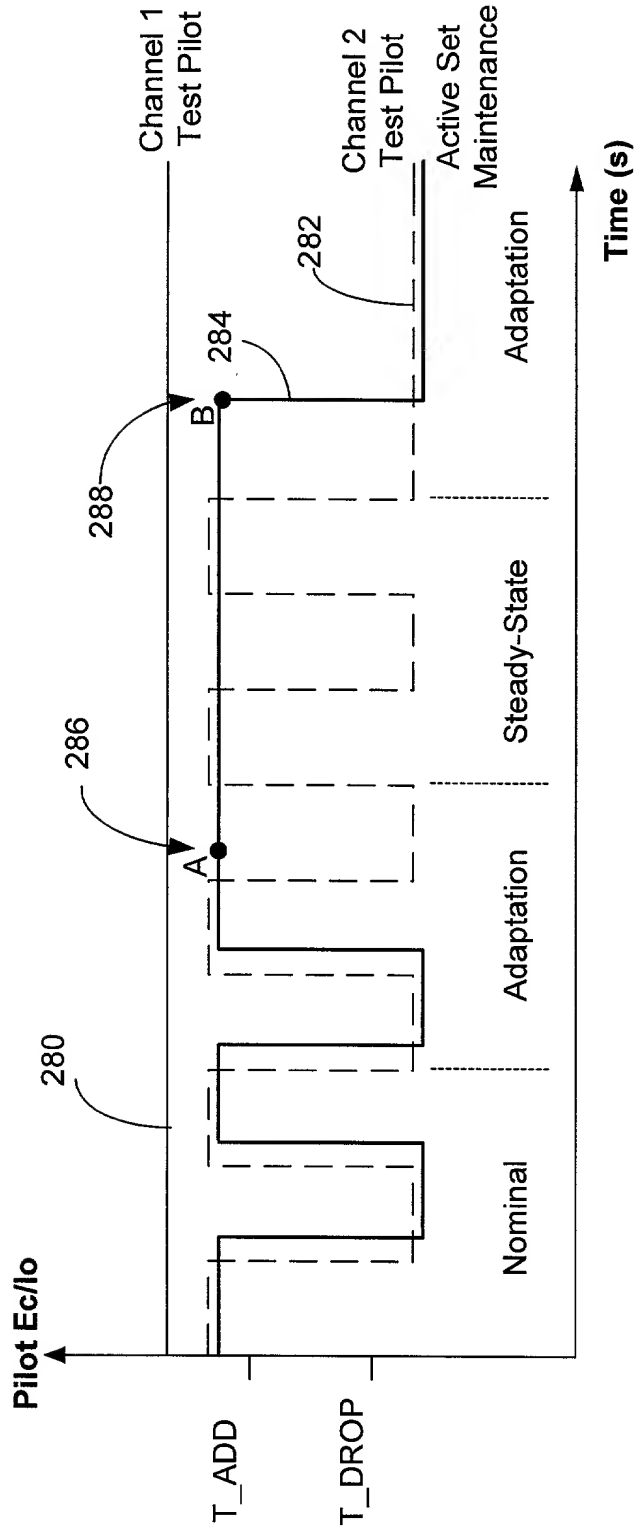


FIG. 6

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled HANDOFF ADAPTATION FOR CDMA SYSTEMS, the specification of which:

☒ is attached hereto.

☐ was filed on _ as Application Serial No. _ and was amended on _____.

☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim the benefit under Title 35, United States Code, §119(e)(1) of any United States provisional application(s) listed below:

U.S. Serial No.	Filing Date	Status
60/220,675	July 25, 2000	Pending

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information I know to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Serial No.	Filing Date	Status
-----------------	-------------	--------

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

09752-095001

Combined Declaration and Power of Attorney

Page 2 of 2 Pages

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Scott C. Harris, Reg. No. 32,030
David L. Feigenbaum, Reg. No. 30,378
Hans R. Troesch, Reg. No. 36,950
Bing Ai, Reg. No. 43,312
John C. Phillips, Reg. No. 35,322
Frederick H. Rabin, Reg. No. 24,488
Joseph L. Stevenson, Reg. No. 43,163

William J. Egan, III, Reg. No. 28,411
James T. Hagler, Reg. No. 40,631
John R. Wetherell, Jr., Reg. No. 31,678
Kenyon S. Jenckes, Reg. No. 41,873
Richard J. Anderson, Reg. No. 36,732
Samuel Borodach, Reg. No. 38,388


Address all telephone calls to SCOTT C. HARRIS at telephone number (858) 678-5070.

Address all correspondence to SCOTT C. HARRIS at:

FISH & RICHARDSON P.C.
4350 La Jolla Village Drive, Suite 500
San Diego, CA 92122

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: JASON F. HUNZINGER

Inventor's Signature: 

Date: 7/24/01

Residence Address:

Carlsbad, CA

Citizenship:

Canada

Post Office Address:

3425 Calle Del Sur
Carlsbad, CA 92009